

Model:


LJX8830-CC

CHARCOAL



Lytton LED Bulkhead

- Wall or ceiling installation
- 30Watt integral LED
- IP65, 3,000K, CRI 80
- Integral Driver

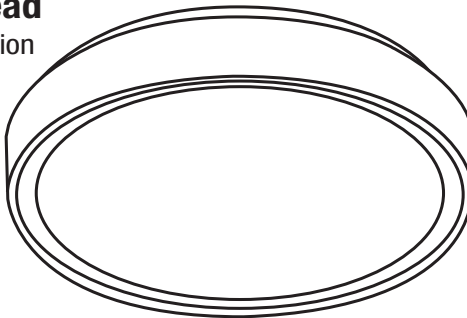

Basic Installation Instructions:

Important:

Isolate the electrical power supply

1. Remove the diffuser by turning the front cover anti clockwise. Fix in place through the 4 screw holes provided
2. Pass the cable through the gromet. Ensure the gromet is sealed to maintain IP65 Rating
3. Connect the supply cable to terminal block: Phase to L, Neutral to N and Earth to \perp and clamp cable.
4. Ensure the gromet and 4 screw holes are sealed to maintain IP65 Rating.
5. Replace the diffuser and ring trim assembly turning clockwise.

NOTE: This light fixture should not be installed where ambient temperatures exceed 35 degrees.

▽ Can be mounted onto timber ceilings.