

LED CEILING AND WALL LIGHTS

Models: CLY and LJY

Installation Instructions

superlux
we engineer light

Important: Installation must be done by a registered electrician. Ensure power supply is OFF.

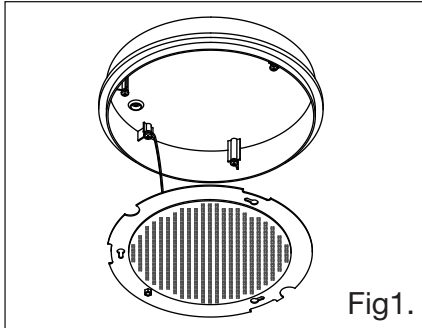


Fig1.

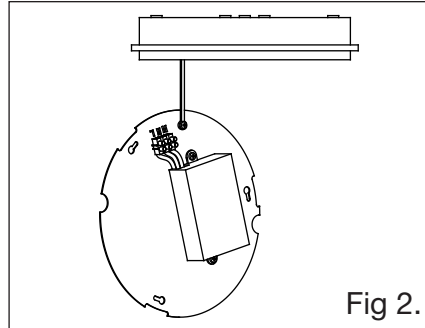


Fig 2.

1. Choose mounting position carefully
2. Disassemble the front diffuser from the lighting fixture.
3. Loosen only the 3 screws in the KEYHOLES of the LED plate.
4. Twist the LED plate using the apertures provided and let the LED plate hang suspended. See Fig 1.
5. Pass the supply cable through the grommet maintaining ingress protection and fasten the lighting fixture back plate in position.
6. Connect the supply cables neutral, earth and live wires to the terminal block as marked, Fig 2.
7. Reassemble the LED gear plate onto the 3 screw heads, twist lock plate back in place and tighten screws.
8. Re-assemble front face to back plate.

