

Slimline Lights

Model: **CLU Slimline LED**


Installation Instructions:




IMPORTANT:

Install using a registered electrician. Isolate the electrical power supply.


1. Take out ceiling light and accessory pack from box and check contents.

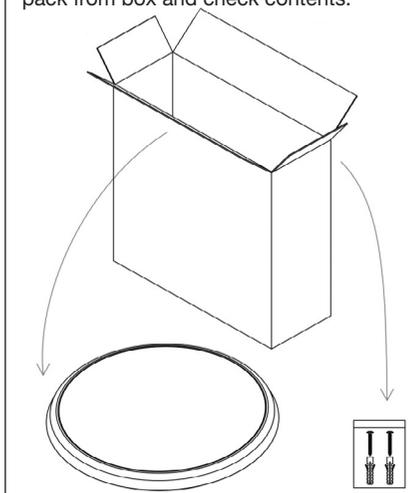

2. Remove screw, take out bracket.




3. Fix mounting bracket to the ceiling or wall using suitable screws.

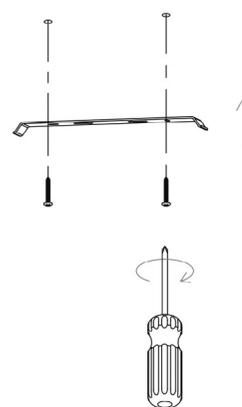

4. Open junction box, connect double insulated cable phase wire to L terminal and neutral wire to N terminal. Replace junction box cover.

- Double insulated **DO NOT EARTH**
- Mount light onto the metal bracket

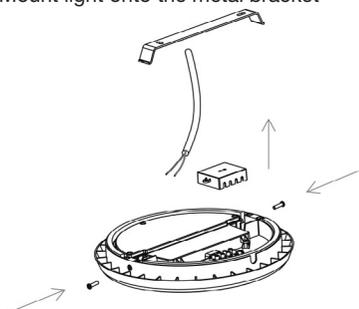

— L = SWITCHED
— N = NEUTRAL

Occupancy sensor models:

Day Light & High Frequency technology sensors built in

- 140-degree detection beam
- Range 7 metres radius up to 5 metre ceiling height
- Not adjustable

Note:

- The sensor light will not operate if the light level is above 100 lux
- When presence is detected the light will not switch off when presence is still detected.
- After presence has gone the light will not switch off for another 30 seconds, then it will switch off until the next movement is detected.

