





Model:

LDL-IP65-SI

Silver

- Wet Area LED Downlight
- IP – ingress protection IP65 rating
- 6.5Watt integral LED

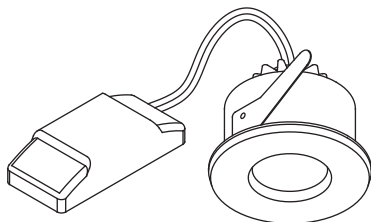

Manufactured in China

- Important:
- install using a registered electrician. Isolate the electrical power supply
1. Minimum cavity depth required 120mmH
 2. When choosing downlight position ensure that SCB=20mm, HCB=50mm
 3. Cavity size must not be less than 0.2m³
 4. Cut hole in ceiling
 5. Connect power supply to LED driver Brown-(L) and Blue-(N)
 6. Insert downlight into the ceiling, holding back the spring steel clips and slide into the ceiling
- **Classification IC-4** WARNING - Risk of overheating or Fire if clearance distances are compromised. Required clearance from structural members and building elements.
 - Please note that this downlight should not be installed where ambient temperatures exceed 30 degrees
 - Can be mounted into timber ceilings
 - **IP65 below ceiling only.**

Installation Instructions:

