



Art. 8100/STL

A1

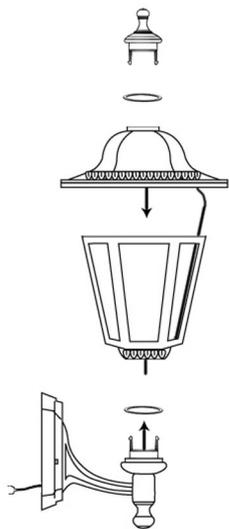


Art.8100/SPL


A2

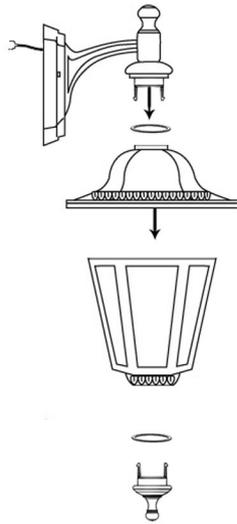

B

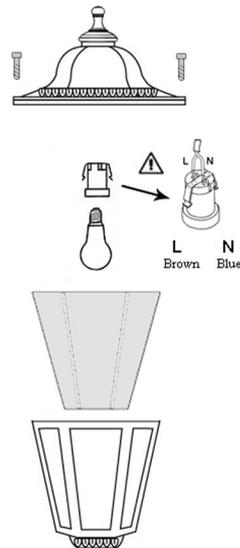

C

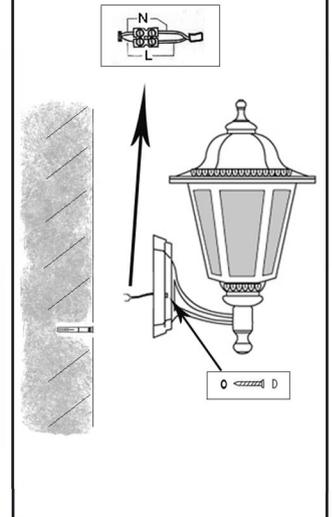

(Italiano)

- Seguire attentamente le istruzioni di montaggio per garantire un corretto funzionamento dell' apparecchio
- Il costruttore declina ogni responsabilita' su prodotti modificati o non installati correttamente.
- Assicurarsi di aver tolto la tensione prima di provvedere all' installazione o alla manutenzione.
- Collegare i due fili al portalampada come illustrato in **figura B**. Fissare il portalampada nell'apposita sede.
- **Art.8100/STL (FIGURA A1)** = Passare il filo nella gabbia e inserirlo nel braccio. Fissare la gabbia al braccio con il bloccaggio rapido posizionando correttamente la guarnizione ed avvitare il grano laterale. Inserire lo schermo e montare la lampadina utilizzando le caratteristiche indicate nell' etichetta. Fissare il finale al cappello utilizzando il bloccaggio rapido posizionando correttamente la guarnizione. Chiudere il cappello fissandolo con le due viti in dotazione. Collegare i due fili al morsetto e successivamente collegarlo alla rete (N-L) come illustrato in **figura C**. Fissare il braccio alla parete utilizzando il kit di tasselli e viti incluso nella confezione
- **Art.8100/SPL (FIGURA A2)** = Passare il filo nel cappello e inserirlo nel braccio. Fissare il cappello al braccio con il bloccaggio rapido posizionando correttamente la guarnizione. Montare la lampadina utilizzando le caratteristiche indicate nell' etichetta. Fissare il finale alla gabbia utilizzando il bloccaggio rapido posizionando correttamente la guarnizione. Inserire lo schermo e chiudere la gabbia fissandola con le due viti in dotazione. Collegare i due fili al morsetto e successivamente collegarlo alla rete (N-L) come illustrato in **figura C**. Fissare il braccio alla parete utilizzando il kit di tasselli e viti incluso nella confezione

(English)

- Follow the assembly directions carefully to ensure that the lantern works well.
- The manufacturer refuses any responsibility arising from an incorrect installation of the products or from a modification of it.
- Before starting installation or maintenance procedures, switch the current off.
- Link the two wires with the lamp-holder as shown in **figure B**. Fix the lamp-holder in its seat.
- **Art.8100/STL (FIGURE A1)** = Pass the wire through the lantern cage and insert it in the bracket. Use the fast blocking to fix the lantern cage to the bracket making sure that the gasket is positioned correctly and screw the side dowel. Fit the diffuser and put the bulb as suggested on the label. Use the fast blocking to fix the final to the lid making sure that the gasket is positioned correctly. Link the lid with the cage, using the two screws supplied. Link the two wires with the terminal and link it with the electricity network (N-L) as shown in **Figure C**. Hook the bracket to the wall by using the enclosed kit of dowels and screws.
- **Art.8100/SPL (FIGURE A2)** = Pass the wire through the lid and insert it in the bracket. Use the fast blocking to fix the lid to the bracket making sure that the gasket is positioned correctly. Put the bulb as suggested on the label. Use the fast blocking to fix the final to the lantern cage making sure that the gasket is positioned correctly. Fit the diffuser and link the lid with the cage, using the two screws supplied. Link the two wires with the terminal and link it with the electricity network (N-L) as shown in **Figure C**. Hook the bracket to the wall by using the enclosed kit of dowels and screws.