


Low Glare and Colour Selectable Downlight 18W
Model: LDUGR150-WH

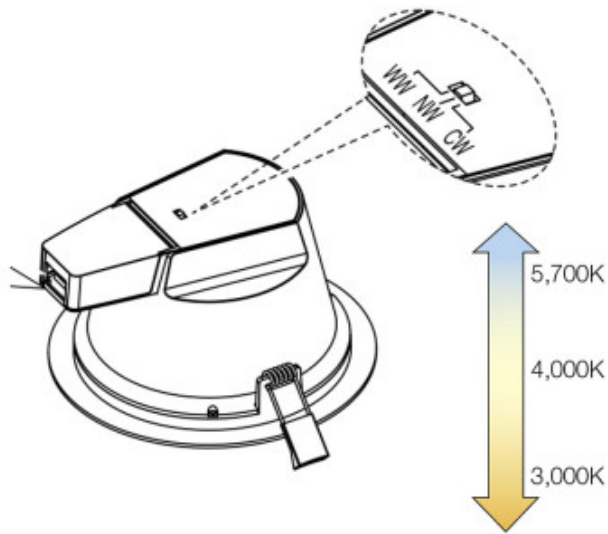

Colour selectable switch

DIMENSIONS	TECHNICAL DATA	FEATURES	SPECIFICATIONS
<ul style="list-style-type: none">• Flange size 173mmØ• 600mmL cordset. Hole cut: 150 Cavity depth: 150 Side clearance: 50	Total lumens: 1710 Power supply: 220-240V Dimmable: Yes CRI: 80 Wattage: 18 Beam angle: 60°	<ul style="list-style-type: none">• Low glare and colour selectable LED downlight.• It's advanced reflector has a less than 19% glare- compliant to UGR<19 standard.• Choose from 3,000K, 4,000K or 5,700K colour temperatures at the flick of a switch.• Use the AS saftey approved cordset supplied or hardwire to TPS using easy to wire extra large terminals.• Total Lumens: 1510 - 1710	Lamp included: Yes Number of lamps: 1 Air / Moisture Transfer: Closed IP Rating: IP54 Technology field: LED Indoor / Outdoor: Indoor Mounting type: Ceiling Colour: White