

5,000  
Lumens

4000  
K

80  
CRI

65°  
Beam Angle

20,000  
Hours  
Lamp Life

LED

Refer to AS/NZS 3000 before installation of recessed luminaires and associated equipment.

Recessed luminaires and their associated equipment may pose risk of fire damage to property if not installed and maintained correctly.


#### Caution:

- Please note that this downlight must not be installed where ambient temperatures exceed 35 degrees.
- Can be mounted into timber ceiling.
- building insulation blankets or segments abutted to sides.
- Class CA135 - This will run safely with non-flammable

#### Installation:

1. Minimum cavity depth required 230mmH.
2. When choosing downlight position ensure that MIC=30mm, SCB=75mm, HCB=100mm.
3. Cavity size must not be less than 0.2M<sup>2</sup>.
4. Cut a 230mmL x 130mmW hole in the ceiling.
5. Connect power supply to connector block, Live (L), Neutral (N) and Earth (E).
6. Ensure mains power supply cable is clamped securely.
7. Insert the SDR48 into the ceiling by holding back the spring clips and slide into ceiling.

Install using a registered electrician. Isolate the electrical power supply.

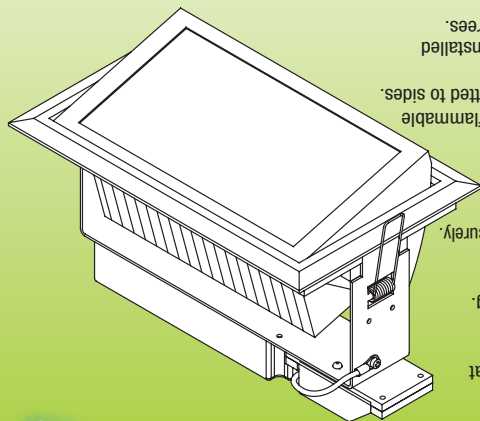

superlux

Model:

# SRD48-TLT-SI

## Rectangular LED Downlight

superlux

- 48 Watt LED COB technology
- Tilttable to 60 degrees
- Flange 250mm x 150mm
- 4,000K
- CA135



48W LED  
similar to 70W  
Metal Halide

SRD48-TLT-SI



Colour: SILVER

## High Power LED

ENGINEERED FOR FIRE SAFETY AND YOUR PEACE OF MIND

Manufactured in China