


Models: WL6010, WL6410 and WL7031 Installation Instructions

superlux
we engineer light

IMPORTANT

- Isolate power supply before installing.
- We recommend that this product is installed by a registered electrician.

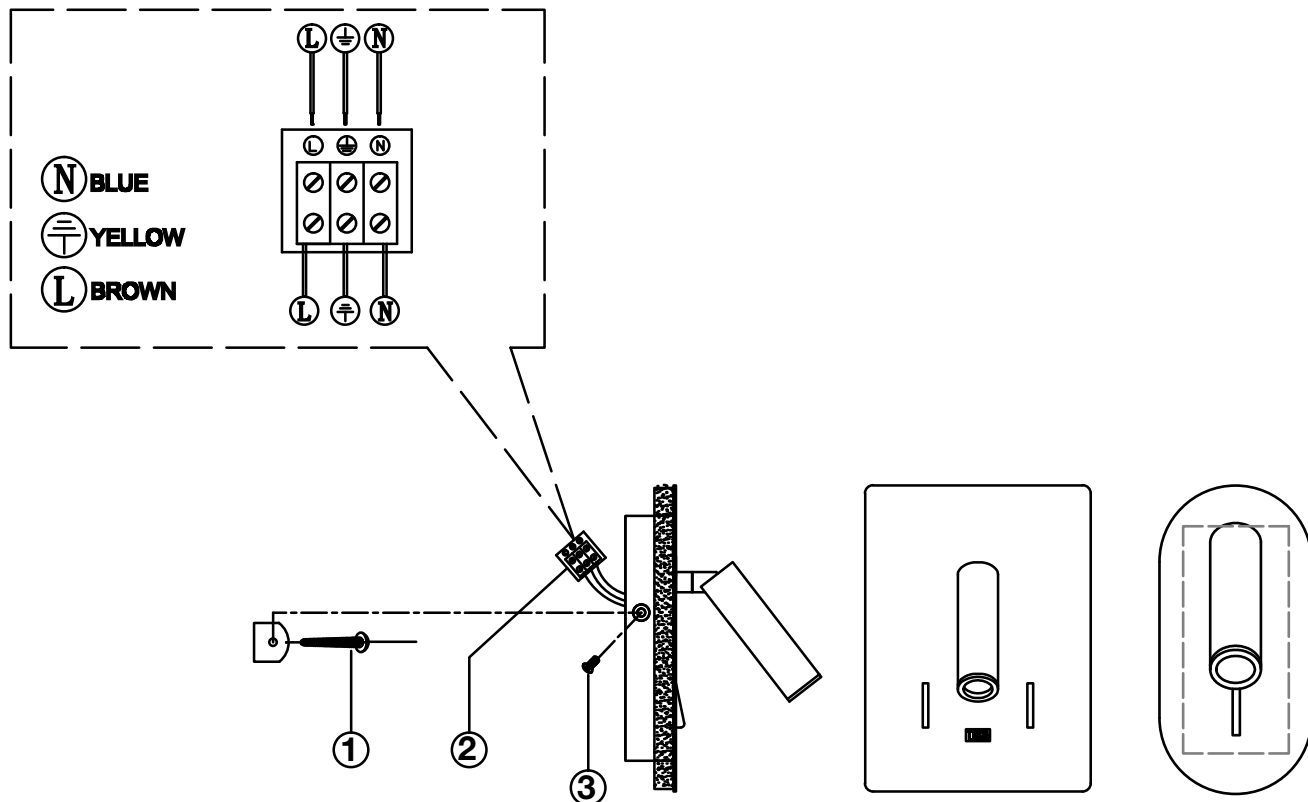

1. Securely fasten mounting bracket to the wall, at a convenient height for the reading light & so it is not easily knocked.
2. Connect Earth, Neutral and Phase (L) wires.
3. Mount the lighting fixture to the wall bracket with the 2 screws at sides.

Notes:

DO NOT bunch up excess cable length behind the backplate, if there is excess cable push it back into the wall or shorten cable.

Model WL7031 – The USB port is for charging purposes only, 5V, 2A.

This product has NO user serviceable components, DO NOT dismantle.